



TDCORE A6-Pro EPOS System



-  **Intel® N97 Alder Lake (Optional: Intel® Core™ i3-1215U / Intel® Core™ i5-1235U)**
-  **8GB RAM / 256GB SSD (Optional: 16GB RAM / 512GB SSD)**
-  **True-Flat Projected Capacitive Multi Touch (PCAP)**
-  **Swappable System Box for Quick Maintenance and Upgrade**
-  **Modular Peripherals for Easy Installation**
-  **Full Onboard Wi-Fi**
-  **IP65 for Front Bezel Compliant**
-  **Ultra-Sleek, Slim, Flexible Design with Optional Engraving**
-  **Aluminum Alloy Die-Casting Housing with Metal Foldable Base**
-  **Available in 15" and 15.6" and with either Windows 10 or 11**
-  **Android Operating Systems Option Available**



Flexible Design



2 Standard Sizes

TDCORE A6-Pro 15"






TDCORE A6-Pro 15.6" (widescreen)






TDCORE A6-Pro 15" Dimensions

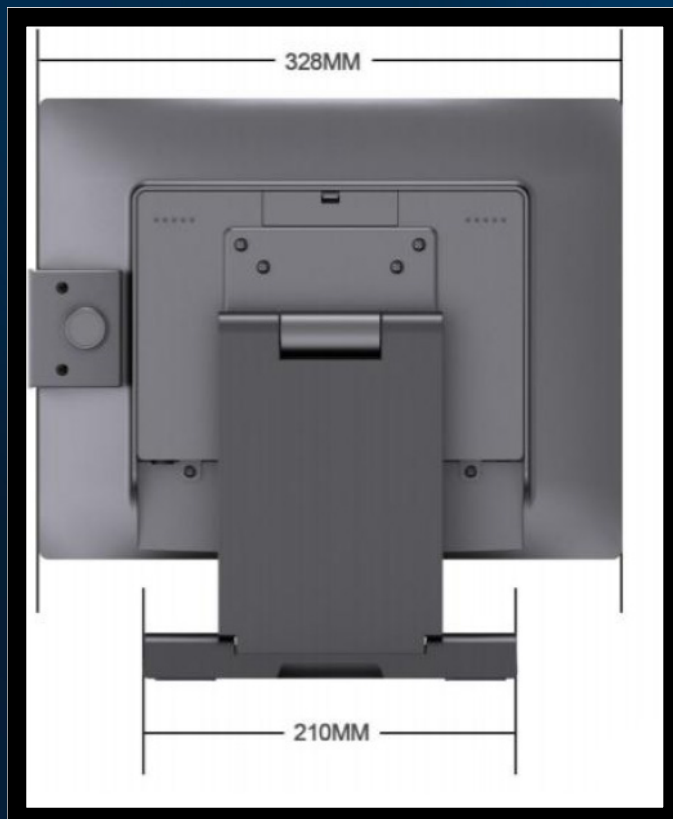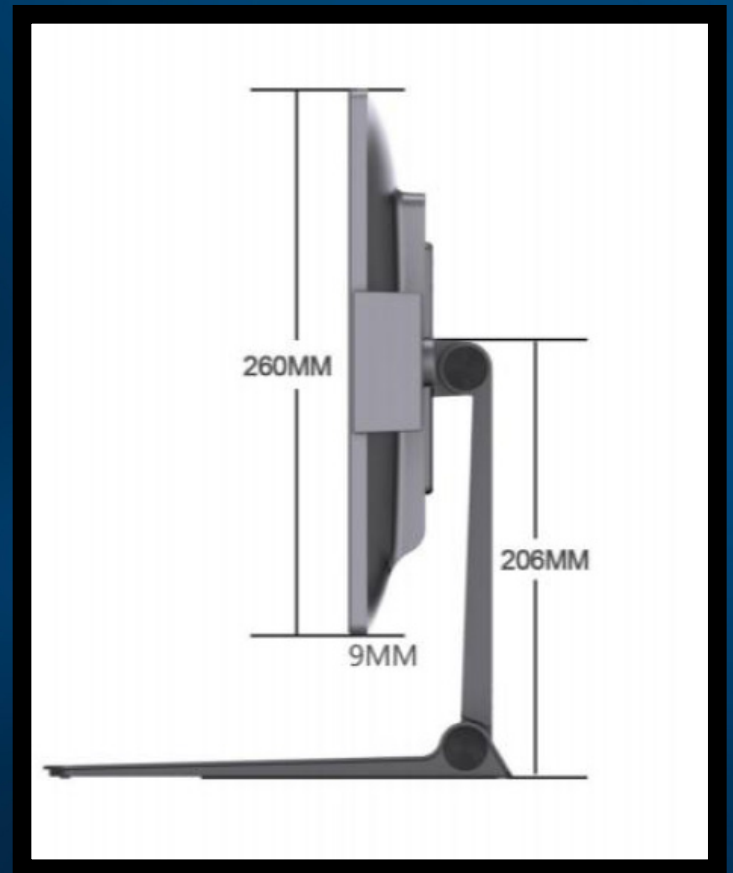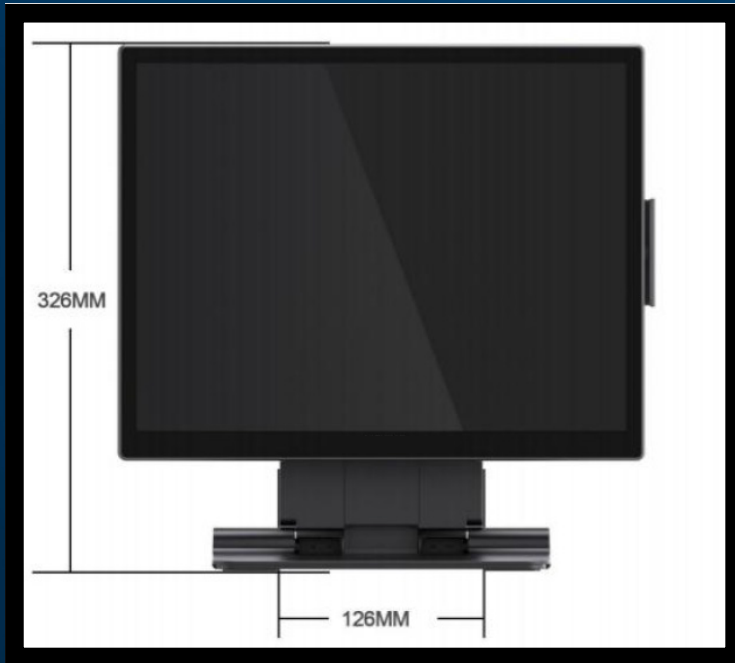



TDCORE A6-Pro 15.6" Dimensions

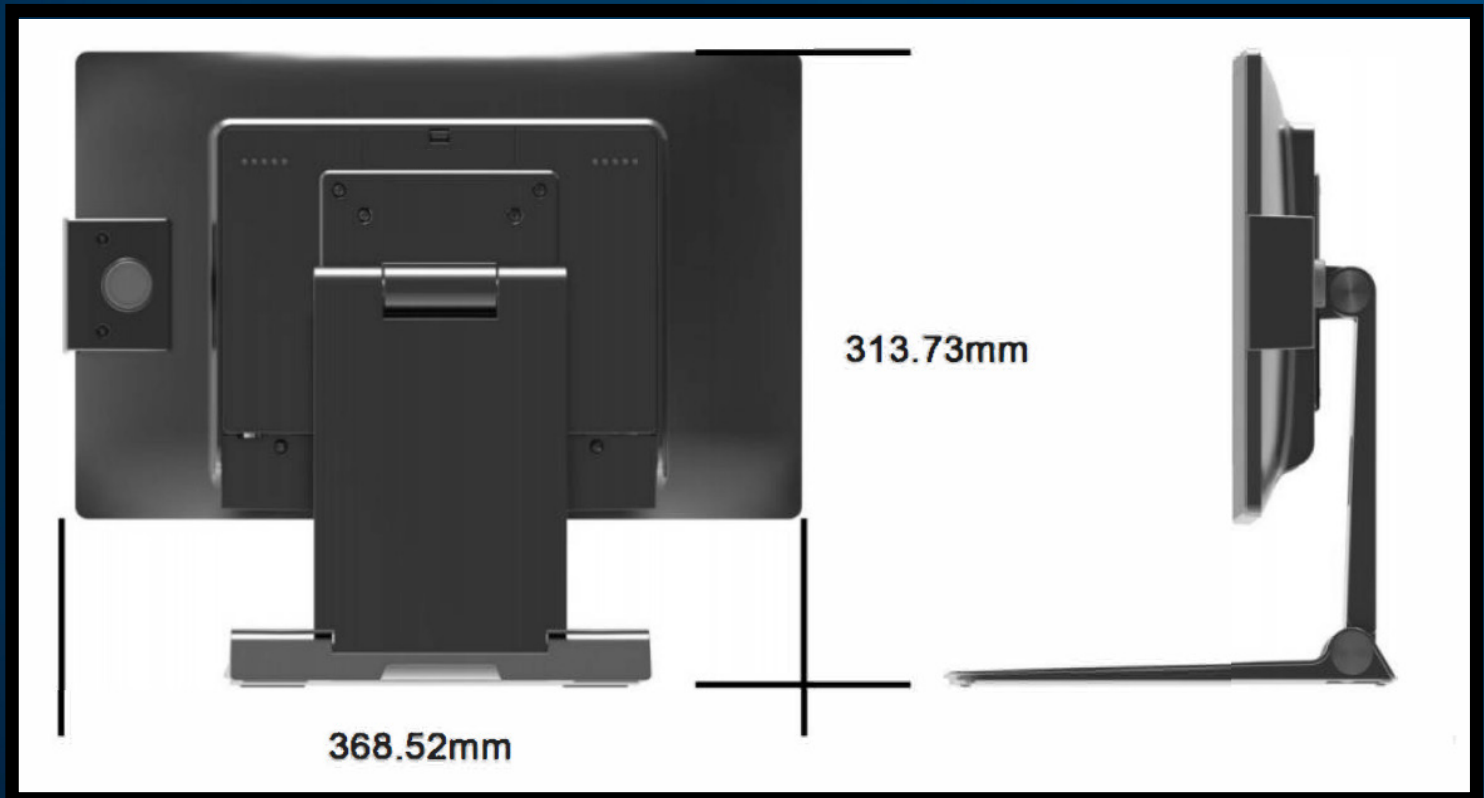

 **Various Screen Sizes to Fit Any Business Needs**

 **Touchscreen sizes from 15"-21.5"**



 **Various Labelled COM Ports as Standard**






Range of Customer Display Possibilities



15" Customer Display Options

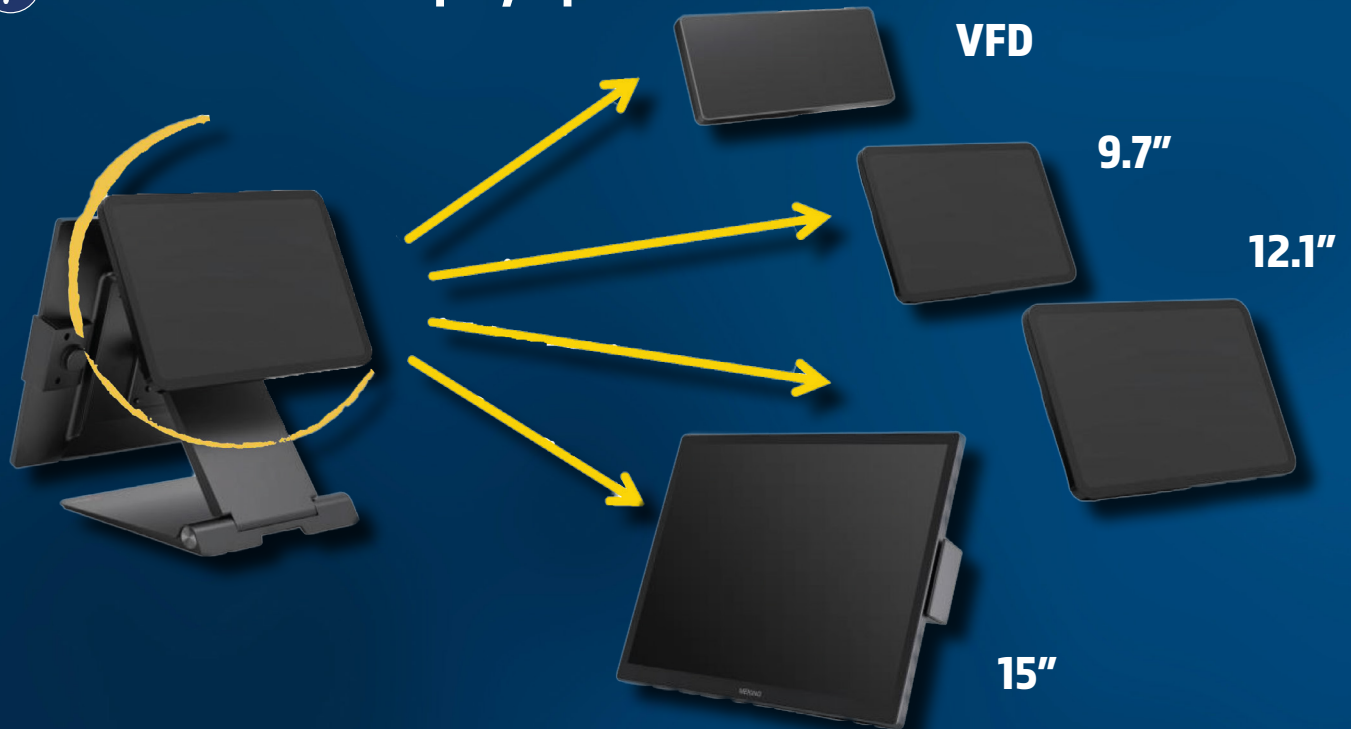

15.6" Customer Display Options





Personalised Engraving Options Available



Clear engraving on the
back of our metallic stand



Can be positioned to still
be seen with rear displays





Versatile Range of Peripherals





Modular Compatibility



Easily change operating system or upgrade processor



Windows 10 or 11



Intel® Processor N97
(6M Cache, up to 3.60 GHz)



Intel® Core™ i3-1215U Processor
(10M Cache, up to 4.40 GHz)



Intel® Core™ i3-1215U Processor
(12M Cache, up to 4.40 GHz)



Android 11 or 12



RK3568 Quad-Core 2.0 GHz Android 11.0



RK3588 Octa-Core 2.2 GHz Android 12.0



Specifications

Main Specifications

Processor	Intel® Processor N97 (6M Cache, up to 3.60 GHz)	Intel® Core™ i3-1215U(10M Cache, up to 4.40 GHz) Intel® Core™ i5-1235U(12M Cache, up to 4.40 GHz)
Memory	DDR4 8G 3200MHz(Max. 16GB)	DDR4 8GB 3200MHz(Max. 16GB)
Storage	M.2 SSD 128GB(Max. 1TB)	M.2 SSD 128GB(Max. 1TB)
Power Supply	12V/5A	12V/8A
OS Support	Win 10/Win 11/Linux	Win 10/Win 11/Linux

Display & Touch

Display	15" TFT LCD Display	15" TFT LCD Display
Resolution	1024x768	1024x768
Touch	True-flat PCAP touch Screen(Support Multi-touch)	True-flat PCAP touch Screen(Support Multi-touch)

I/O Expansion

Serial Port	RJ50x3	RJ50x3
USB Port	USB3.0x4 + USB2.0x2	USB3.0x4 + USB2.0x2
LAN Port	10/100/1000 MBx1	10/100/1000 MBx1
Display Port	HDMIx1	HDMIx1
Audio	Line-out&Mic-in 2-in-1x1	Line-out&Mic-in 2-in-1x1
Cash Drawer	RJ12x1	RJ12x1

Physical Dimension

Packaging Dimension	415x175x435MM	415x175x435MM
Gross Weight	5.0KGS	5.0KGS

Environmental

Operating Condition	0°C - 40°C, 20%RH - 90%RH	0°C - 40°C, 20%RH - 90%RH
Storage Condition	-20°C ~ 70°C, 10%RH - 90%RH	-20°C ~ 70°C, 10%RH - 90%RH

Options & Peripherals

2nd Display	VFD/9.7"/12.1"/15" 2nd Display	VFD/9.7"/12.1"/15" 2nd Display
MSR	Support 1/2/3 track	Support 1/2/3 track
Dallas Key	Dallas I-button Reader	Dallas I-button Reader



01299 488 031



info@tills-direct.com



www.tills-direct.com



Ratio Park, Finepoint Way, Kidderminster, DY11 7FF